



a general purpose corrosion resistant Stainless Steel

**20 mesh x .355mm dia 304L**


Free Area            **51.9**        %  
 Wire Diameter      **0.355**      mm  
 Nominal Aperture   **915**        micron

Weave Type            **plain**

Weight, kg per m2    **1.25**

Typical Composition (key elements)

Nickel                 **8 - 12%**  
 Chromium            **18 - 19%**  
 Carbon                **max 0.03%**

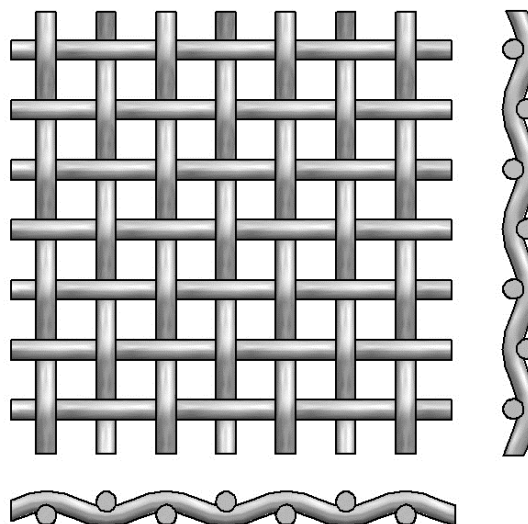

weave image

Available Formats        - please ask for options not listed below

- Rolls                    ✓            up to            1524 mm wide
- Pieces                ✓
- Circles                ✓
- Panels                 ✓
- Strips                 ✓

all information is provided in good faith - actual values may vary according to available stock and standard norms  
 weights and measures are nominal values only  
 in accordance with the requirements of ISO 9044 latest issue

contact            [sales@unitedwire.com](mailto:sales@unitedwire.com)  
 visit                [www.unitedwire.com](http://www.unitedwire.com)  
 call                 **(+44) (0)131 552 6241**

United Wire • Granton Park Avenue • Granton • Edinburgh • EH5 1HT • UK  
 Tel: +44 131 552 6241 · Email: [info@unitedwire.com](mailto:info@unitedwire.com) · Website: [www.unitedwire.com](http://www.unitedwire.com)

United Wire is a business operated by M-I Drilling Fluids U.K. Limited  
 Registered office: Peregrine House, Peregrine Road, Westhill Business Park, Westhill, Aberdeenshire, Scotland, AB32 6JL  
 Registered in Scotland No. 161934

