



a general purpose corrosion resistant Stainless Steel

**40 mesh x .224mm dia 304L**


Free Area **41.9** %  
 Wire Diameter **0.224** mm  
 Nominal Aperture **411** micron

Weave Type **plain**

Weight, kg per m2 **1.00**

Typical Composition (key elements)

Nickel **8 - 12%**  
 Chromium **18 - 19%**  
 Carbon **max 0.03%**

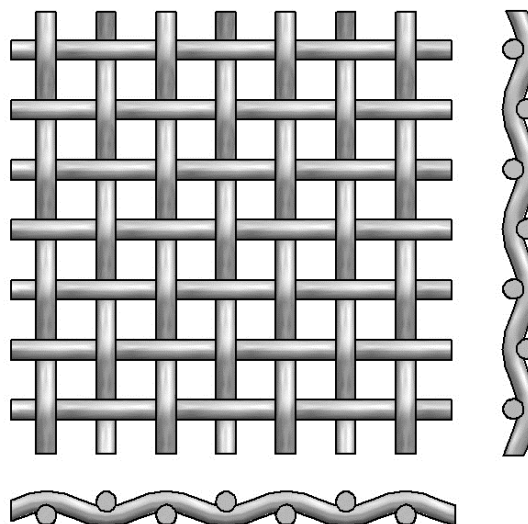

weave image

Available Formats *- please ask for options not listed below*

- Rolls ✓ up to 1524 mm wide
- Pieces ✓
- Circles ✓
- Panels ✓
- Strips ✓

**all information is provided in good faith - actual values may vary according to available stock and standard norms**  
**weights and measures are nominal values only**  
**in accordance with the requirements of ISO 9044 latest issue**

**contact** [sales@unitedwire.com](mailto:sales@unitedwire.com)  
**visit** [www.unitedwire.com](http://www.unitedwire.com)  
**call** **(+44) (0)131 552 6241**

United Wire • Granton Park Avenue • Granton • Edinburgh • EH5 1HT • UK  
 Tel: +44 131 552 6241 · Email: [info@unitedwire.com](mailto:info@unitedwire.com) · Website: [www.unitedwire.com](http://www.unitedwire.com)

United Wire is a business operated by M-I Drilling Fluids U.K. Limited

Registered office: Peregrine House, Peregrine Road, Westhill Business Park, Westhill, Aberdeenshire, Scotland, AB32 6JL

Registered in Scotland No. 161934

